

UliTank

Vers. 2.4

User's Manual

Copyright © 2016-2019 Dr. Ulrich Remmlinger
All rights reserved

latest update available at
www.remmlinger.com

The program UliTank is not a commercial product. The software should only be used for research work. It has not been tested exhaustively and is not free from errors. It comes therefore without any warranty and no liability whatsoever can be accepted by the author.

The software is protected by copyright and intellectual property laws. The author reserves all rights. The software is licensed free of charge but not sold. You may install it on your computer for your own personal use, but you may not distribute or sell the software or copies of it. If you do not agree to these conditions, you must not download the software.

UliTank_2.4.exe was compiled with the Intel® Fortran compiler for Windows. When you start it for the first time, new OS (Windows 8 and 10) will block the execution and display a message that UliTank might contain a risk to your computer. The reason for this message is the fact, that UliTank comes without a certificate and Microsoft tries to enforce its own certification process. Since UliTank is free software, it is impossible to buy every year an expensive new certificate. You can click on the information button in the message, “accept the risk” and run the program. If you don’t trust me, you can check the program with Malwarebytes or with your own anti-virus software before running it.

Contents

1. Introduction
2. The installation of UliTank
3. The input files
4. Running the program
5. The output files
6. Examples
7. References

1. INTRODUCTION

My work in yacht research is centered on the extended use of the computer in the design spiral. The computer is an ideal tool when it comes to multiple iteration loops as in the optimization process for the design of a sailing yacht. A detailed description of the idea can be found in [1]. The first module in the automated design process is the program UliLines [2]. With only a few input variables UliLines creates the complete hull form of a sailing yacht and provides a table of offsets as output. The next module in the workflow is the program UliTank. Based on a regression analysis of towing tank results, UliTank estimates the resistance of the hull for a given speed. In the version UliTank 2.4 the resistance is restricted to the bare or appended hull of a sailing yacht in the heeled condition but without sideforce. The inclusion of the influence of leeway and sideforce is planned for the future. The table of offsets that is required as input to UliTank can come from any CAD-system, the origin of the lines-plan is not restricted to UliLines. Several different input formats are allowed.

Since UliTank 2.1 the raw data as published by TU Delft are corrected for the blockage effect of the towing tank. Compared to UliTank 2.0 the correction can be as large as 10%. The predicted resistance is therefore the value for unrestricted waters of infinite depth. UliTank 2.4 uses a few different parameters for the linear regression and gives more robust results than UliTank 2.2 and UliTank 2.3.

UliTank 1.0 was based on a regression analysis that used the towing tank tests, conducted at the Delft University of Technology. The tests covered a wide range of hull forms for sailing yachts, called the Delft Systematic Yacht Hull Series (DSYHS). My work was only possible because the researchers at TU Delft decided in a really generous act to make the entire experimental data sets of all hulls that were tested over the last 40 years available to the public. Since the beginning of 2013 the data is online [3]. In 2015 the Sailing Yacht Research Foundation (SYRF) published results of a tank test program from 2003 that was until then not available in the open literature. The tested fleet is called the US Sailing Nine Model Series [4]. This was a great opportunity to extend the database for the regression analysis. UliTank 2.4 uses now the combined test results of the DSYHS and the data from the SYRF in the upright as well as the heeled condition, with bare and appended hulls. As a result of this significant increase in the data, there are now at least 250 independent tank runs available at each Froude-number in the medium speed range. This is the regression analysis with the largest database in the open literature.

The theoretical background of the regression analysis and the choice of the relevant hull parameters for UliTank 2.3 are described in [5], reading is recommended. It is also recommended to study the description [3] of the DSYHS and [4] of the Nine Model Series, because the quality of the resistance prediction will deteriorate for hull forms that are outside of the database. New additional Information about the Nine Model Series is described in [8]. The regression applies only to hull forms with a transom, not to double-enders.

2. INSTALLATION OF THE PROGRAM

The zipped file that you downloaded contains the executable files UliTank_2.4-X64.exe, UliTank_2.4-Win32.exe, this manual UTman_2.4.pdf, five subdirectories and the excel-file Examp1.xlsx. You should unpack the zipped file into a folder of your own choice that you have named appropriately (e.g. UliTank). You can execute the program directly in this folder by clicking on the file UliTank_2.4.exe. Depending on your Computer, you should use either

the 64-bit or the 32-bit version of the program. If X64 doesn't run, try Win32. The input files are stored in the subdirectories named OFFSETS, APPEND and INPUT and the output files will be stored in DRAG and UTANK. These five subdirectories should not be renamed or deleted. The file Exmpl.xlsx contains several sheets with diagrams that compare the predicted resistance to the test results. If you want to uninstall the program, you just need to delete the complete folder UliTank.

3. THE INPUT FILES

The offsets of the hull are stored in the folder OFFSETS. The name of the file must be OFFS_###.txt. The additional hull- and control- parameters are stored in the folder INPUT. The name of this file must be UT_###_in.txt. The ### stands for three digits or three characters that can be chosen by the user to distinguish between different projects. The three digits or characters will also be used in the names of the output files. The folder APPEND contains the file that describes the keel and rudder of the yacht. The name of this file is specified in UT_###_in.txt and must be in the form #####.txt, containing eight characters. The structure of the input files can best be understood by examining the examples OFFS_s01.txt, UT_s01_in.txt and AP_DSYHS that are contained in the downloaded folders. These three files describe the model Sysser 01 of the DSYHS.

3.1 The offset-file

It is mandatory to describe the hull surface in the form of offsets. Other descriptions of the surface (e.g. an IGES-file) are not supported. The hull offsets are the x,y,z-coordinates of the surface points along the sections from keel to deck level. Each section can have different z-values. The x-axis lies in the symmetry-plane in the fore and aft direction. The y-axis has its origin in the symmetry-plane and runs at right angles to it. The z-axis is vertical. The positive directions of the x- and z-axis must be specified in UT_###_in.txt. The origins of the x- and z-axis are automatically determined by the program. When the sections are fixed in the CAD-model, the transom and some stations forward of the designed waterline should be included, since the size of the transom- and bow- overhang has an influence on the resistance. There are three different formats that can be read by the program. The chosen format must be declared in UT_###_in.txt.

The simplest format (FORMAT = 1) is just a list of points. Each point starts at a new line and the x-, y- and z-coordinate are separated by a blank, a comma or a tab stop. Make sure that a decimal point is used inside the numbers and no comma. All points that belong to the same section have the same x-coordinate and have to be listed consecutively. A change in the x-value will indicate the beginning of a new section. The files OFFS_s01.txt to OFFS_s71.txt and OFFS_us5.txt use this format and can be regarded as examples. The files for the Sysser-models were copied from [3], where they are called "points file". The file for model us5 was created from an IGES-file in [4] using Rhino.

The format with the code FORMAT = 2 is used when the offsets are written by the program DELFTship. Use the export option "stations". Since DELFTship exports only 3 decimal places the accuracy might not be sufficient for small models. OFFS_dsh.txt is an example of this format.

The third possibility to import offsets is FORMAT = 3, which specifies the GHS-format. Many CAD-programs offer this export format. An example is the file OFFS_ghs.txt. UliTank starts reading the file at the line with the asterisk. All the lines above are ignored and can be used

for comments. Some programs like DELFTship add additional points at deck-level. In this case the usage of GHS is not possible because UliTank can only identify points on the hull-surface or on the symmetry-plane. If there is no other possibility to export the sections, then the deck-points must be deleted manually.

3.2 Hints to create an offset file

The easiest way to create an offset file is to run UliLines-3.3 or UliLines-4.4 with the parameter CADOUT = 4. One only has to move the output file from UliLines to the folder OFFSETS.

If you have created the hull in Rhino, you should define between 30 and 50 vertical planes. You might want to use a closer spacing at bow and stern. Create the intersections between these planes and the hull surface. Define points on these intersection-curves: go to Curve – Point object – Divide curve by – Number of segments, type "40" and use the option "mark ends = yes". Make sure that there are no other, previously created points on this layer, switch all other layers off and use the command: Save as – Points (*.txt). Transfer this file into the folder OFFSETS and rename it OFFS_###.txt.

A hull that was created in ProSurf can be exported using the option Data File Output – GHS Output. Prior to that you have to define between 30 and 50 stations using the command: PlaneCuts – Initialize Lines. Many CAD-programs convert the units into feet and change the positive x-direction when the export option GHS is chosen. ProSurf does not do that; the coordinates are exported as drawn. In case the offsets are measured in feet, a value of 3.2808 should be entered for SCALE (see below).

If you use DELFTship to design a hull, then make sure that you export a model of sufficient length. The model in the example OFFS_dsh.txt has originally a length of 3 meters. If this model is exported using "stations", the accuracy of 3 decimal places is not sufficient. The execution time of UliTank would be extremely long and spurious convergence might occur. The model was therefore scaled up by a factor of 10 in all three directions, i.e it was created with a length of 30 meters. In the next step you should define 30 to 50 stations using the command: Intersections – Stations. Select the medium Precision and write a .txt file via File – Export – Stations. Transfer the file into OFFSETS and rename it into OFFS_###.txt.

3.3 The file UT_###_in.txt

The purpose of this file is the collection of the control parameters and the input of the test conditions. The input file is built by a sequence of line-pairs. The first line always contains an explanation and the second line the numerical value of the parameter. The program reads only every second line and in that line only the first number until the first blank behind this number. The rest of the line is ignored. This is convenient if you want to test different values for a parameter and you want to memorize what has been tested: just move it to the right and type the new value in the left-most position.

Now let's inspect the file UT_s01_in.txt line by line

```
Headline:
*      DSYHS parent model Sysser 1      *
FORMAT specifies data format in the offset-file: 1= point coordinates; 2= DelftShip; 3= GHS
1
```

In the second line, the user can type a description of the yacht or of the project. This headline will also appear in the output files. The third line is a description of the possible offset formats, as described in chapter 3.1. In the fourth line the chosen integer value is submitted.

```
XAXIS  positive x-direction in offset-file: 1= from stern to bow; 2= from bow to stern
1
ZAXIS  positive z-direction in offset-file: 1= from keel to deck; 2= from deck to keel
1
SCALE  = numerical value of distance in offset-file / distance at tank-model in meters
1000.
```

XAXIS and ZAXIS tell the program in which direction the values of the coordinates in the offset file increase. The parameter SCALE allows the definition of any desired model size, be it a small towing tank model or a full size ship. UliTank requires all dimensions in meters. In this example the numbers in the offset file are millimeters. The length of the waterline L_{WL} in the offset file is 1600. The model in the towing tank has an L_{WL} of 1.6 m. The scale factor is therefore $1600/1.6 = 1000$.

```
VOLUME = immersed volume of the canoe body (w/out appendages) of the tank model in m3
0.0376136
ZTOW   = height of towing point above still water surface in mm
255.
XTOW   = distance of towing point from forward end of DWL (FP) in m
0.301
```

The input of the immersed volume in m^3 is used to calculate the draft and the position of the L_{WL} . ZTOW is the vertical distance of the towing point above the still water level, measured in millimeters. The positive distance from the forward end of the designed waterline (forward perpendicular) to the towing point in x-direction in meters is named XTOW.

```
APPEND = name of the file, that contains the description of the appendages: AP_XXXXX.txt
AP_DSYHS.txt
LEK    x-distance LE keel to origin x=0, origin defined in offset-file (m)
1.083
LER    distance LE rudder to origin x=0 (m) in the waterplane
0.124
```

APPEND is the name of the text-file in the folder APPEND that contains the description of keel and rudder. The name must consist of eight characters plus the extension .txt. LEK and LER define the position of the leading edge of the appendages, relative to the origin $x = 0$ of the coordinate system. This coordinate system is the one that is used in the offset-file. For a swept keel or rudder, the uppermost point of the leading edge is taken.

```
HTRIP  = height of trip (sandgrain or pin), canoe-body in mm
1.0
DPIN   = diameter of pin, if pin used for tripping, canoe-body in mm
0.
NPIN   = number of pins, canoe-body, use 0 for sandgrain with Delft-method
0
XTRIP  = average distance of pins or sand strips from FP in mm, canoe-body
260
```

HTRIP is the height of the sand grains that form the boundary-layer trip in the DSYHS. If there is no trip, then $HTRIP = 0$. In some towing tanks pins or studs are used as tripping device. In this case HTRIP indicates the pin-height, DPIN describes the diameter of the pins and NPIN is the number of submerged pins. The positive distance from the forward perpendicular to the pins or sand strips is named XTRIP. It should not be mixed up with the actual transition point. If the Delft-method is employed, the resistance of the sand strips is already subtracted from the measured resistance and only these corrected values are

published. In this case NPIN must be set to zero. If NPIN is different from zero, the program calculates the pin-drag and uses this additional force in the equilibrium of forces and moments.

```
HATRIP = height of trip (sandgrain or pin), appendages in mm
1.0
DAPIN = diameter of pin, if pin used for tripping, appendages in mm
0.
NPINKL = number of pins for b.l.-trip keel, use 0 for sandgrain with Delft-method
0
NPINRD = number of pins for b.l.-trip rudder, use 0 for sandgrain with Delft-method
0
```

HATRIP, DAPIN, NPINKL and NPINRD describe the equivalent parameters for the appendages. The meaning is the same as for the canoe-body.

Compared to UliTank_2.3, UliTank_2.4 offers only the linear regression model. The quadratic regression model was deleted, because for models with parameters even only slightly outside of the database the quadratic regression model gave unrealistic results.

The following values describe the test conditions in the towing tank.

The integer number NTEST is identical to the number of rows that contain speed values. Each line represents a test run in the towing tank. The first column indicates the towing speed in m/s. Next column is the trimming moment caused by movable weights in Nm. The applied moment is positive, if the bow is moved down, otherwise it is negative. Next is the fresh water temperature in the tank, recorded in degrees Celsius. The fourth column shows the turbulence level in %. For the definition of Tu and a recommendation of its value see [6]. In the next column we find the distance from the forward perpendicular to the active boundary-layer trip in millimeters. When there are several trips, this distance can vary, depending on which of the trips is active. If natural transition is assumed, then Xtrip should be larger than the total length of the model. A subroutine in the program will always check, if natural transition occurs, before the prescribed trip is reached. The actual position of the switch in the computation to the turbulent regime will be printed on the screen during the execution. The heel-angle in degrees is given in the next column. The last column indicates, whether the hull is appended or not. Integer 1 stands for hull with keel and rudder, 0 indicates bare hull only.

```
NTEST = number of rows, each row simulates a test point
41
IROWBL = row-number for which boundary-layer data will be printed
5
one row per testpoint. Speed in m/s, external trimming moment in Nm - bow down is positive,
fresh water temperature in degrees Celsius, turbulence level in %,
distance of trip from FP in mm, heel angle in degrees, appended yes=1
speed      Trimmoment      Ttank      Tu%      Xtrip      heel      append
0.398069   0.000000          17.3      2.06     500        0        0
0.597122   0.000000          17.3      1.20     260        0        0
0.796200   0.000000          17.3      0.82     260        0        0
0.995311   0.000000          17.3      0.61     20         0        0
1.195471   0.000000          17.3      0.48     20         0        0
1.394681   0.000000          17.3      0.39     20         0        0
1.593961   0.000000          17.3      0.32     20         0        0
1.793328   0.000000          17.3      0.28     20         0        0
1.992809   0.000000          17.3      0.24     20         0        0
2.192474   0.000000          17.3      0.21     20         0        0
2.392537   0.000000          17.3      0.19     20         0        0
0.995311   1.432250          17.3      0.61     20         0        0
1.195471   2.864500          17.3      0.48     20         0        0
1.394681   4.296750          17.3      0.39     20         0        0
1.593961   8.593500          17.3      0.32     20         0        0
1.793328   17.187000         17.3      0.28     20         0        0
1.992809   28.645000         17.3      0.24     20         0        0
2.192476   38.670751         17.3      0.21     20         0        0
```

2.392546	42.967501	17.3	0.19	20	0	0
0.398069	0.000000	17.3	1.50	2000	20	0
0.597122	0.000000	17.3	0.20	500	20	0
0.796200	0.000000	17.3	0.82	260	20	0
0.995311	0.000000	17.3	0.61	260	20	0
1.195471	0.000000	17.3	0.48	20	20	0
1.394681	0.000000	17.3	0.39	20	20	0
1.593961	0.000000	17.3	0.32	20	20	0
1.793328	0.000000	17.3	0.28	20	20	0
0.502620	0.000000	20.0	4.00	260	0	1
0.603155	0.000000	20.0	3.00	20	0	1
0.703696	0.000000	20.0	2.00	20	0	1
0.804244	0.000000	20.0	1.38	20	0	1
0.904801	0.000000	20.0	1.22	20	0	1
1.005368	0.000000	20.0	1.10	20	0	1
1.105946	0.000000	20.0	1.00	20	0	1
1.206536	0.000000	20.0	0.92	20	0	1
1.307141	0.000000	20.0	0.85	20	0	1
1.407763	0.000000	20.0	0.79	20	0	1
1.508402	0.000000	20.0	0.73	20	0	1
1.609061	0.000000	20.0	0.69	20	0	1
1.709743	0.000000	20.0	0.65	20	0	1
1.810450	0.000000	20.0	0.61	20	0	1

If additional information about the boundary-layer is of interest, then IROWBL will specify the tank run for which additional data will be printed in OUT_###.txt. In this example the 5th row with the speed of 1.195 m/s will trigger the printout of the boundary-layer data.

3.4 The file AP_#####_in.txt

The appendages are defined in this file. The general structure is the same as in UT_###_in.txt. The file for the Delft-models is named AP_DSYHS.txt. An explanation line by line follows:

```
* Standard keel DSYHS, all dimensions at tank model scale *
DXCOGK distance COG to LE keel (m)
0.2582
ACOFFK section area coefficient
0.6581
TFIN draft of fin-keel from root to tip, at right angle to waterplane (m)
0.219
```

The first line is just comments, that will not be read. DXCOGK is the positive distance in x-direction of the center of gravity of the keel to the uppermost point of the leading edge. ACOFFK is the section area coefficient, it is defined as the section area divided by chord and max. thickness. TFIN is the draft of the fin-keel from the bottom of the canoe-body to the lowest tip of the keel, measured at a right angle to the designed waterplane.

The following table is a description of the geometry of the keel:

Chord (m)	thickness ratio	for the given vertical position
0.4140	0.15	at fin-root, close to canoe body
0.3843	0.15	at 19.51% TFIN down from root
0.3558	0.15	at 38.27% TFIN down from root
0.3295	0.15	at 55.56% TFIN down from root
0.3065	0.15	at 70.71% TFIN down from root
0.2876	0.15	at 83.15% TFIN down from root
0.2736	0.15	at 92.39% TFIN down from root
0.2649	0.15	at 98.08% TFIN down from root

For a given distance vertically downward from the root, the chord and the thickness ratio of the section must be given. The thickness ratio is the maximum thickness of the foil-section divided by the chord. This method of describing the geometry allows for a large variety of keel-forms that need not to have straight contours.


```

* Standard rudder DSYHS *
DXCOGR distance COG to LE rudder (m)
0.0613
TRUD draft of rudder from z=0 (DWL) to tip, at right angle to waterplane (m)
0.266
CURUD upper chord at waterplane-level (m), if necessary extended inside the cb to the LE
0.124
CLRUD lower chord at tip (m), parallel to waterplane
0.096
TCURD thickness ratio of upper section at top (-)
0.1193
TCLRD thickness ratio of lower section at tip (-)
0.1193
ACOFFR section area coefficient
0.6786

```

The description of the rudder is similar to the keel. The first line is again just a comment. Since the upper part of the rudder follows normally the contour of the hull, the chord at the waterplane-level is not uniquely defined. To overcome this, the leading edge of the rudder is extended upwards to the waterplane, if necessary even inside the canoe-body. The upper chord length CURUD is then defined as the distance from the extended leading edge to the trailing edge in the waterplane. The other parameters are analogous to the keel-parameters.

```

* foil section shapes, thickness will be adjusted
SSHAPE 1= NACA 63(2)A015 as in DSYHS, 2= NACA 64(2)A013 as in USSAIL
1


```

SSHAPE defines the section-shape. Integer 1 defines the sections as used in the DSYHS. The keel employs a NACA 63₂A015 section and the rudder is made of NACA 0012. Integer 2 is appropriate for the models of the US Sail series. Keel and rudder both have sections of the form NACA 64₂A013. The drag coefficient for each foil section is calculated with the program XFOIL [7] as a function of the Reynolds-number and the thickness ratio.

It is advisable to save one of the downloaded input files without altering it. It can be used as a template for further input files in the future.

4. RUNNING THE PROGRAM

When opening UliTank_2.4.exe the following window will appear and will ask you for the identifiers of the input file (depending on the setting of your command prompt options, the background color might be black):

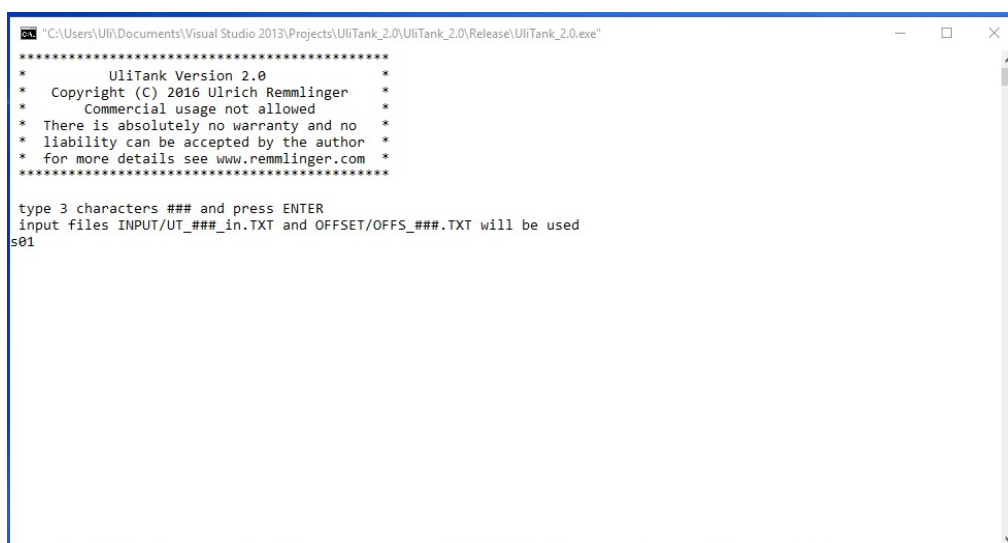

If you want to execute the program with the input file UT_s01_in.txt in the folder INPUT then type s01 and press enter. The offsets will be taken from the file OFFS_s01.txt in the folder OFFSET. The program is not case sensitive if characters replace ###. The program will display diagnostic messages and will indicate the termination.

The towing force at a given distance above the water level will exert a bow down moment around the y-axis. This and any additionally applied trimming moment will change the sinkage and trim of the model. The sinkage and trim-angle are determined in an iterative search for the hydrostatic equilibrium of forces and moments. The resulting attitude of the hull at rest must not be confused with the trim and sinkage at speed, these values are unknown. If the definition of the hull surface is not smooth, but wavy or stepped, it can happen that an infinitesimal change of the sinkage or trim will result in a large jump of the forces or moments. In such a case the true equilibrium can not be found, spurious convergence is detected and a message is displayed. If the remaining error is less than 0.1% of the required forces or moments, the values are accepted as a valid solution. If you use an offset file of a small model that was produced with DELFTship, such a situation can occur, because the restricted accuracy of only three decimal places in the coordinates will cause a stepped keel line that is constantly flat across several stations but with occasional jumps of the last digit. In such a situation a very small change in the trim-angle will cause a large change in L_{WL} .

Depending on the clock-speed of your computer, the operating system and on the smoothness of the model, it can take anything from milliseconds to minutes for the computation to converge. If the run was not successful and an error occurred, you might be able to adjust your parameters or offsets based on the displayed message. After termination press Enter and the window will close and you can inspect the output files in two program folders.

5. THE OUTPUT FILES

The result of the computations is a table of resistance values vs. speed. It can be found in the folder DRAG in the file DRAG_###.txt. The values are separated by commas and you need to use the import-assistant to convert this text-file into an excel-file. The table on the next page is the output for Sysser 1, identified as DRAG_s01.txt. In the first column you will find the value of the Froude-number, based on the actual trimmed L_{WL} . The next five columns show the viscous-, keel-, rudder-, residuary- and total-resistance values in N, calculated with the new regression formula. If sand strips, studs or pins are used to trip the boundary-layer, then $R_{\text{visc-trip}}$ is the calculated viscous resistance of these strips or pins. This value is not contained in R_{total} and must be subtracted from the measured resistance in the tank, to make the test results comparable with the prediction. The measured resistance values for the DSYHS are already corrected for the parasitic drag of the sand strips, no additional correction is necessary. Column 8 and 9 contain the predicted resistance for the bare hull using the Delft-method. The definition of these resistance components is explained in [5]. In the next six columns the resistance values are converted into dimensionless coefficients. The forces are divided by the dynamic pressure and the wetted surface according to:

$$C = \frac{R}{\frac{1}{2} \cdot \rho \cdot U^2 \cdot A_{\text{wet}}}$$

* DSYHS parent model Sysser.1 *														
Resistance values calculated with UliTank - linear regression model														
for details see www.remmlinger.com														
FN	Rvsc-cb (N)	Rkeel (N)	Rrudder (N)	Residu (N)	Rt (N)	Rvsc-trip(N)	Rvsc-delft	Rt delft (N)	C visc-cb	C appendgs	C residu	C t	Cvsc-delft	Ct delft
0.10022	0.24984	0.0	0.0	0.01417	0.26401	0.00932	0.29312	0.30030	0.00487	0.0	0.00028	0.00515	0.00572	0.00586
0.15034	0.56813	0.0	0.0	0.05349	0.62161	0.02100	0.59981	0.62456	0.00492	0.0	0.00046	0.00539	0.00520	0.00541
0.20047	0.96060	0.0	0.0	0.16386	1.12446	0.03738	0.99958	1.14753	0.00468	0.0	0.00080	0.00548	0.00487	0.00559
0.25061	1.51585	0.0	0.0	0.41031	1.92616	0.05956	1.48761	1.93821	0.00473	0.0	0.00128	0.00601	0.00464	0.00605
0.30101	2.12763	0.0	0.0	1.00529	3.13292	0.08726	2.06359	3.18878	0.00460	0.0	0.00217	0.00677	0.00446	0.00690
0.35119	2.79376	0.0	0.0	2.26371	5.05747	0.12012	2.71912	5.30462	0.00444	0.0	0.00360	0.00804	0.00432	0.00843
0.40142	3.58003	0.0	0.0	6.64577	10.22580	0.16152	3.45483	10.69484	0.00435	0.0	0.00808	0.01244	0.00420	0.01301
0.45172	4.53523	0.0	0.0	15.74657	20.28180	0.21272	4.26904	20.87620	0.00436	0.0	0.01513	0.01949	0.00410	0.02006
0.50211	5.9813	0.0	0.0	28.26502	33.86315	0.27125	5.16044	35.10260	0.00436	0.0	0.02200	0.02635	0.00402	0.02732
0.55255	6.78040	0.0	0.0	39.81274	46.59314	0.33632	6.12814	47.73493	0.00436	0.0	0.02560	0.02996	0.00394	0.03069
0.60306	8.04102	0.0	0.0	45.44221	53.48322	0.40517	7.17233	54.68771	0.00434	0.0	0.02453	0.02888	0.00387	0.02953
0.25064	1.51434	0.0	0.0	0.42781	1.94215	0.06012	1.48761	1.93053	0.00472	0.0	0.00133	0.00606	0.00464	0.00602
0.30109	2.11816	0.0	0.0	1.02515	3.14331	0.08880	2.06359	3.17013	0.00458	0.0	0.00222	0.00680	0.00446	0.00686
0.35132	2.77480	0.0	0.0	2.27075	5.04556	0.12310	2.71912	5.20455	0.00441	0.0	0.00361	0.00802	0.00432	0.00827
0.40170	3.53164	0.0	0.0	6.65142	10.18307	0.16904	3.45483	10.46839	0.00430	0.0	0.00809	0.01239	0.00420	0.01273
0.45249	4.38088	0.0	0.0	16.53398	20.91487	0.23142	4.26904	21.30568	0.00421	0.0	0.01589	0.02010	0.00410	0.02047
0.50319	5.29018	0.0	0.0	30.81847	36.10865	0.30990	5.16044	37.13894	0.00412	0.0	0.02398	0.02810	0.00402	0.02890
0.55425	6.27860	0.0	0.0	42.72720	49.00581	0.39905	6.12815	50.69837	0.00404	0.0	0.02747	0.03151	0.00394	0.03260
0.60522	7.41614	0.0	0.0	49.02797	56.44411	0.48903	7.17237	57.17621	0.00400	0.0	0.02647	0.03047	0.00387	0.03087
0.10182	0.17078	0.0	0.0	0.01428	0.18506	0.00948	0.28919	0.29638	0.00333	0.0	0.00028	0.00361	0.00564	0.00578
0.15274	0.47139	0.0	0.0	0.04386	0.51525	0.02134	0.59178	0.61653	0.00409	0.0	0.00038	0.00447	0.00513	0.00534
0.20367	0.96871	0.0	0.0	0.12069	1.08940	0.03805	0.98619	1.13414	0.00472	0.0	0.00059	0.00531	0.00481	0.00553
0.25461	1.46739	0.0	0.0	0.35319	1.82058	0.06077	1.46768	1.91828	0.00458	0.0	0.00110	0.00568	0.00458	0.00598
0.30583	2.13964	0.0	0.0	1.07208	3.21172	0.08888	2.03595	3.16113	0.00463	0.0	0.00232	0.00695	0.00440	0.00684
0.35682	2.82111	0.0	0.0	2.47834	5.29945	0.12262	2.68269	5.26819	0.00448	0.0	0.00394	0.00842	0.00426	0.00837
0.40787	3.63897	0.0	0.0	6.67509	10.31406	0.16494	3.40854	10.64856	0.00443	0.0	0.00812	0.01255	0.00415	0.01295
0.45899	4.62342	0.0	0.0	15.99221	20.61563	0.21687	4.21185	20.81901	0.00444	0.0	0.01537	0.01981	0.00405	0.02001
0.12655	0.41656	0.13632	0.05842	0.03001	0.64131	0.07235	0.43510	0.44955	0.00510	0.00238	0.00037	0.00785	0.00533	0.00550
0.15186	0.60170	0.20078	0.08130	0.05319	0.93698	0.10421	0.60093	0.62861	0.00511	0.00240	0.00045	0.00796	0.00511	0.00534
0.17718	0.78789	0.27680	0.10706	0.09861	1.27035	0.14187	0.79012	0.87007	0.00492	0.00240	0.00062	0.00793	0.00493	0.00543
0.20250	1.00288	0.36343	0.13330	0.17155	1.67116	0.18537	1.00201	1.15735	0.00479	0.00237	0.00082	0.00799	0.00479	0.00553
0.22782	1.24755	0.46019	0.15971	0.26535	2.13279	0.23506	1.23670	1.51461	0.00471	0.00234	0.00100	0.00806	0.00467	0.00572
0.25315	1.51950	0.56652	0.19442	0.44164	2.72208	0.29095	1.49184	1.96419	0.00465	0.00233	0.00135	0.00833	0.00456	0.00601
0.27848	1.81966	0.68188	0.23167	0.74867	3.48189	0.35302	1.76894	2.52433	0.00460	0.00231	0.00189	0.00880	0.00447	0.00638
0.30382	2.12741	0.80574	0.27186	1.20131	4.40633	0.42039	2.06702	3.22952	0.00452	0.00229	0.00255	0.00936	0.00439	0.00686
0.32916	2.44879	0.93760	0.31520	1.74232	5.44392	0.49387	2.38578	4.07507	0.00443	0.00227	0.00315	0.00985	0.00432	0.00737
0.35454	2.79224	1.07710	0.36185	2.84469	7.07589	0.57405	2.72495	5.49966	0.00436	0.00225	0.00444	0.01104	0.00425	0.00858
0.37998	3.17304	1.22410	0.41183	4.92027	9.72924	0.66110	3.08428	7.82972	0.00431	0.00222	0.00669	0.01322	0.00419	0.01064
0.40527	3.58897	1.37853	0.46513	8.24960	13.68223	0.75522	3.46356	11.25118	0.00429	0.00220	0.00985	0.01634	0.00414	0.01344
0.43068	4.05011	1.54041	0.52169	13.06976	19.18196	0.85662	3.86260	15.99149	0.00428	0.00218	0.01382	0.02029	0.00409	0.01692
0.45611	4.55094	1.70942	0.58135	18.88807	25.72977	0.96517	4.28121	21.94993	0.00429	0.00216	0.01782	0.02427	0.00404	0.02071

Diagrams for a graphical representation of the results can easily be drawn, using the standard excel-functions. Examples can be found in the excel-file "Exempl" in the folder.

A second output file OUT_###.txt is contained in the folder UTANK. It lists several useful hull dimensions and dimensionless parameters for the hull at rest, without additional trimming moment. If the parameter IROWBL is different from zero, then additional boundary-layer data will be printed at the end of the file. The file OUT_s01.txt looks like this:

```
*      DSYHS parent model Sysser 1      *
Geometry defined in: OFFS_s01.TXT

Hull properties calculated with UliTank
for details see www.remmlinger.com

values at rest, without trim in fresh water
immersed volume canoe body (m3) = 0.376136E-1
immersed volume fin keel (m3)   = 0.25525E-2
immersed volume rudder (m3)    = 0.23290E-3
total mass of the yacht (kg)    = 40.359
wetted surface canoe body (m2) = 0.647784
waterplane area (m2)           = 0.558306
designed waterline (m)         = 1.608
maximum beam (m)               = 0.513
maximum draft (m)              = 0.127
Cx                              = 0.6394
Cp                              = 0.5623
Cwp                             = 0.6780
LCB in % Lwl behind FP         = 52.128
LCF in % Lwl behind FP         = 53.152
Rocker angle at stern (deg)    = 19.378
height longt. metacentre BM (m) = 1.230

boundary-layer data for FN = 0.30
x dist.to FP  V/shipspeed  C fric  delta1 (m)
0.000         0.0000       -        0.00000
0.012         0.7123       0.01256  0.00012
0.053         0.8398       0.00847  0.00022
0.103         0.8975       0.00741  0.00032
0.153         0.9364       0.00689  0.00042
0.203         0.9653       0.00648  0.00052
0.253         0.9886       0.00608  0.00061
0.303         1.0040       0.00570  0.00070
0.353         1.0160       0.00544  0.00080
0.403         1.0275       0.00525  0.00089
0.453         1.0377       0.00507  0.00098
0.503         1.0463       0.00489  0.00107
0.553         1.0539       0.00474  0.00117
0.603         1.0599       0.00458  0.00127
0.653         1.0645       0.00444  0.00138
0.703         1.0682       0.00430  0.00149
0.753         1.0709       0.00417  0.00161
0.803         1.0727       0.00404  0.00173
0.853         1.0739       0.00392  0.00187
0.903         1.0744       0.00380  0.00201
0.953         1.0749       0.00370  0.00216
1.003         1.0755       0.00359  0.00232
1.053         1.0757       0.00349  0.00249
1.103         1.0751       0.00337  0.00270
1.153         1.0721       0.00321  0.00297
1.203         1.0650       0.00300  0.00335
1.253         1.0526       0.00272  0.00390
1.303         1.0356       0.00240  0.00472
1.353         1.0144       0.00204  0.00598
1.403         0.9900       0.00162  0.00799
1.453         0.9638       0.00116  0.01146
1.503         0.9271       0.00045  0.02075
1.553         0.8853       0.00000  0.03481
1.603         0.8672       0.00000  0.03481
1.653         0.8925       0.00000  0.03481
1.676         0.9047       0.00000  0.03481
```

The b.l.-data is arranged in four columns. The first indicates the distance of the station from the forward end of the actual waterline in x-direction, measured in meters. The next column lists the fraction of the velocity at the outer edge of the b.l. divided by the ships speed. The column `Cfric` shows the skin friction coefficient. A value of zero indicates a separated b.l. In the last column one can find the displacement thickness `delta1` of the b.l. measured in meters. The boundary-layer computation uses an integral method for the equivalent body of revolution [6].

6. EXAMPLES

There are several sheets in the file `Exempl.xlsx` that compare the predicted and measured resistance values. The corresponding input files are available in `OFFSETS` and `INPUT`. The sheets `DRAG_s01` to `DRAG_s71` compare the results for the DSYHS-models Sysser 01 to Sysser 71. For Sysser 23 the version with the cut off transom is used. This example demonstrates the influence of the transom overhang on the resistance at higher Froude numbers.

For some of the appended Sysser models the published value of the measured resistance at lower Froude-numbers is higher than the predicted resistance. The reason for this discrepancy is the assumption by the Delft-team that the resistance of the sandstrips on the appendages is independent of its position and that the resistance increases linearly with the width of the strip. Close to the nose of the foil this is not true, the parasitic drag is underestimated and the value of the published drag is too high. For the sandstrips on the hull such an assumption is valid, because the velocity gradient along the hull is much smaller than the gradient close to the stagnation point at the foil.

The files `OFFS_ghs.txt` and `UT_ghs_in.txt` demonstrate the usage of the GHS format (`FORMAT = 3`). Sysser 72 was loaded into ProSurf and exported as GHS-file. The resistance results are included in the sheet `DRAG_ghs`.

An example that uses DELFTship is the monohull of the catamaran Delft 372. The predictions in `DRAG_dsh` are compared to the tank data. The length of the tank model is 3 meters. Because DELFTship only exports 3 digits after the decimal point, the accuracy of the offsets would be not sufficient. Therefore the hull is modeled in DELFTship with a length of 30 meters and exported via the option “stations”. The parameter `SCALE` in `UT_dsh_in.txt` is $30/3 = 10$. This compensates the upscaling in DELFTship and the model is back to its original L_{WL} of 3 meters. Even with this manipulation the predicted resistance deviates from the test results. The reason is the lofting method in DELFTship. The hullform that is created from the input data is not really smooth. If instead Rhino is used for the lofting and the creation of the table of offsets, UliTank predicts resistance values that are much closer to the test results.

The sheet `DRAG_us5` shows the prediction for the parent model #M5 of the US Sailing Nine Model Series. The sheet `DRAG_wlp` compares the prediction for the hull of the “Wide-Light-Project” with test results that were published by the SYRF.

The examples show in most cases that the new regression is much better than the old Delft method. If you encounter difficulties that are not covered within this manual you can send me an e-mail at ulrich@remmlinger.com and I will be happy to help you. Good luck with your computations!

7. REFERENCES

- 1 Remmlinger U. (2006), "Design Process Automation for Sailing Yachts", *2nd High Performance Yacht Design Conference, Auckland*
- 2 available online at www.remmlinger.com
- 3 <http://dsyhs.tudelft.nl>
- 4 Teeters, J., Pallard, R., Muselet, C. (2003), "US Sailing Nine Model Series", available online at www.sailyachtresearch.org
- 5 Remmlinger U. (2017), "Resistance Prediction for Sailing Yacht Hulls Based on Systematic Towing Tank Tests", available online at www.remmlinger.com
- 6 Remmlinger U. (2015), " Bare Hull Upright Resistance Prediction Based on the Delft Systematic Yacht Hull Series ", available online at www.remmlinger.com
- 7 Drela, M., Youngren, H., XFOIL Computer Program. [Online]. Available: <http://web.mit.edu/drela/Public/web/xfoil/>
- 8 Remmlinger U. (2018), "The US Sailing Nine Model Series", available online at www.remmlinger.com

RHINOCEROS® is a registered trademark of Robert McNeel & Associates

DELFTship™ is a trademark of Delftship BV, the Netherlands

ProSurf is a program by Steven M. Hollister